



Roll Compactor RC 650 · RC 655

EN - 02/2025


Compact, robust and economic in use!

The Welger RCs are the further development based on the proven system of the Welger Waste Roller. The RCs work with many different, cleanly sorted packaging materials. Especially very re-expanding waste materials can be reduced down to 10% of its original volume. Easy accessibility for service, high safety standards and an improved handling are the essential features of the RCs.


The Welger RCs have the worldwide approved and optimised Welger design of rolling compression, with two wide, circulating conveying belts with a special gripping structure profile. These belts form a round bale chamber in which the compression of the introduced material is carried out. Because of the construction of the baler the compressed material cannot re-expand, either in the bale chamber or during interruption of the baling process.

Advantages at a glance:

- Extremely compact, solid and mobile style
- Semi automatic operation
- Strong volume reduction without re-expansion
- Impressive cost saving operation by a low deployment of labour and by reduced effort of storage, transportation and disposal
- Better hygienic conditions in the company, extremely safe operation



Technical Data:	RC 650	RC 655
Depth	1600 mm	1600 mm
Width	940 mm	940 mm
Height	1850 mm	1850 mm
Weight	700 kg	700 kg
Bale diameter	up to 400 mm	up to 400 mm
	3-position pre-select	adjustable
Bale length	600 mm	600 mm
Bale weight (depending on material)	up to 30 kg	up to 30 kg
Throughput	up to 300 kg/h	up to 300 kg/h
Binding material	stretch film 23 µm	stretch film 23 µm
Binding and balde ejection	semi automatic	fully automatic
Reversed operation	semi automatic	semi automatic
Indicating of bale diameter	LED bar graph	Touchdisplay
Signals indicating maximum filling level	acoustic	acoustic + optical
Securing the protective hoods by	safety position switches	safety position switches

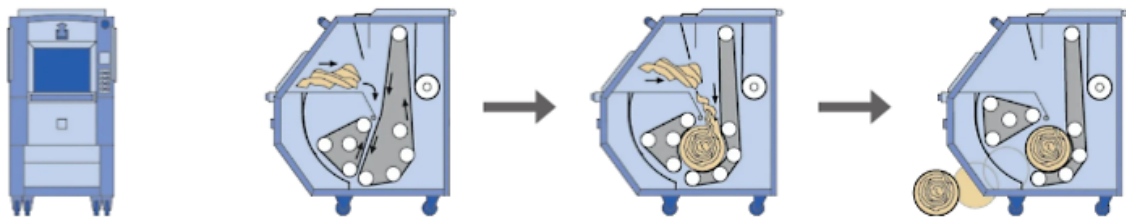

The electrical equipment complies with the VDE regulations. The relevant electricity supply company's regulations must be observed when connecting to the power supply. The connection to an electrical power supply must be protected with at least 16 A (delayed) on the building side. The right is reserved to make technical modifications.



You **Tube**



Linked **in**



Welger Recycling Engineering GmbH

Grotrian-Steinweg-Str. 4b

38112 Braunschweig

Germany

info@welger.com

www.welger-recycling.com

